



JAGAT GURU NANAK DEV PUNJAB STATE OPEN UNIVERSITY, PATIALA

(Established by Act No. 19 of 2019 of the Legislature of State of Punjab)

The Motto of the University
(SEWA)

SKILL ENHANCEMENT

EMPLOYABILITY

WISDOM

ACCESSIBILITY



Bachelor of Computer Applications (BCA)

Course Name: Operating Systems Lab

Course Code: BCA-2-01P

ADDRESS: C/28, THE LOWER MALL, PATIALA-147001

WEBSITE: www.psou.ac.in



**JAGAT GURU NANAK DEV
PUNJAB STATE OPEN UNIVERSITY PATIALA**
(Established by Act No.19 of 2019 of Legislature of the State of Punjab)

PROGRAMME & COURSE COORDINATOR :

Dr. Monika Pathak

Assistant Professor, School of Sciences and Emerging Technologies

Jagat Guru Nanak Dev Punjab State Open University, Patiala

PROGRAMME CO-COORDINATOR :

Dr. Gaurav Dhiman

Assistant Professor, School of Sciences and Emerging Technologies

Jagat Guru Nanak Dev Punjab State Open University, Patiala



**JAGAT GURU NANAK DEV
PUNJAB STATE OPEN UNIVERSITY PATIALA**
(Established by Act No.19 of 2019 of Legislature of the State of Punjab)

PREFACE

Jagat Guru Nanak Dev Punjab State Open University, Patiala was established in Decembas 2019 by Act 19 of the Legislature of State of Punjab. It is the first and only Open Universit of the State, entrusted with the responsibility of making higher education accessible to all especially to those sections of society who do not have the means, time or opportunity to pursue regular education.

In keeping with the nature of an Open University, this University provides a flexible education system to suit every need. The time given to complete a programme is double the duration of a regular mode programme. Well-designed study material has been prepared in consultation with experts in their respective fields.

The University offers programmes which have been designed to provide relevant, skill-based and employability-enhancing education. The study material provided in this booklet is self instructional, with self-assessment exercises, and recommendations for further readings. The syllabus has been divided in sections, and provided as units for simplification.

The Learner Support Centres/Study Centres are located in the Government and Government aided colleges of Punjab, to enable students to make use of reading facilities, and for curriculum-based counselling and practicals. We, at the University, welcome you to be a part of this institution of knowledge.

Prof. G. S. Batra,
Dean Academic Affairs

BCA-2-01P: Operating Systems Lab

Total Marks: 50
External Marks: 15
Internal Marks: 35
Credits: 2
Pass Percentage:
40%

Course: Operating Systems Lab	
Course Code: BCA-2-01P	
Course Outcomes (COs)	
After the completion of this course, the students will be able to:	
CO1	Demonstrate the installation process of various operating systems.
CO2	Implement virtualization by installing Virtual Machine software.
CO3	Apply UNIX/LINUX operating system commands.
CO4	Understand different UNIX/LINUX shell scripts
CO5	Implement and execute various shell programs.

Detailed List of Programs:

Programme No.	Name of Program
P1	Install UNIX/LINUX – Complete Step by Step
P2	Study of Basic UNIX Commands and various UNIX editors such as vi, ed, ex and EMACS
P3	Write a shell script that deletes all lines containing the specified word in one or more files Supplied as arguments to it.
P4	Write a shell script that displays a list of all files in the current directory to which the user has read, write and execute permissions
P5	Write a shell script that receives any number of file names as arguments checks if every argument supplied is a file or directory and reports accordingly. Whenever the argument is a file it reports no of lines present in it
P6	Write a shell script that accepts a list of file names as its arguments, counts and reports the occurrence of each word that is present in the first argument file on other argument files.
P7	Write a shell script to list all of the directory files in a directory
P8	Write a shell script to find factorial of a given number


P9	Write an awk script to count number of lines in a file that does not contain vowels
P10	Write an awk script to find the no of characters ,words and lines in a file
P11	Implement in C language, the following Unix commands using system calls a) cat b) ls c) mv
P12	Write a C program that takes one or more file/directory names as command line input and reports following information
P13	Write a C program to list every file in directory, its inode number and file name
P14	Write a C program to create zombie process
P15	Write a C program to illustrate how an orphan process is created
P16	Write client server programs using c for interaction between server and client process using Unix Domain sockets

EXPERIMENT NO: 1. a)

To Install Ubuntu Linux – Complete Step by Step


Step 1 : Insert the ubuntu cd in the cd drive and boot the computer from cd. First of all you will be prompted to select language. elect English or other language according to your preferences.

Step 2 : Now you will see ubuntu menu, you can choose **Try ubuntu without installing** option to try ubuntu without actually installing it on your hard drive. For installing ubuntu choose the second option **Install Ubuntu**.

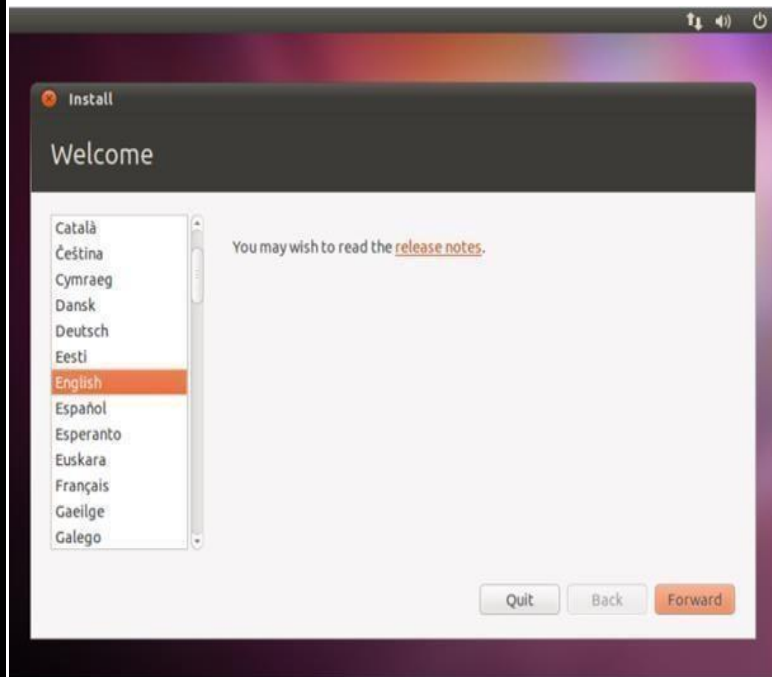


Step 3 : Ubuntu will start now initialize and after few minutes you can see the installation wizard.


Step 4 : Click Forward and it will check the **minimum requirements for running ubuntu** on your PC. If everything is fine you can see green colored tick marks. You can also select to download updates while installing and install some third party software. After selecting the things you want click forward.

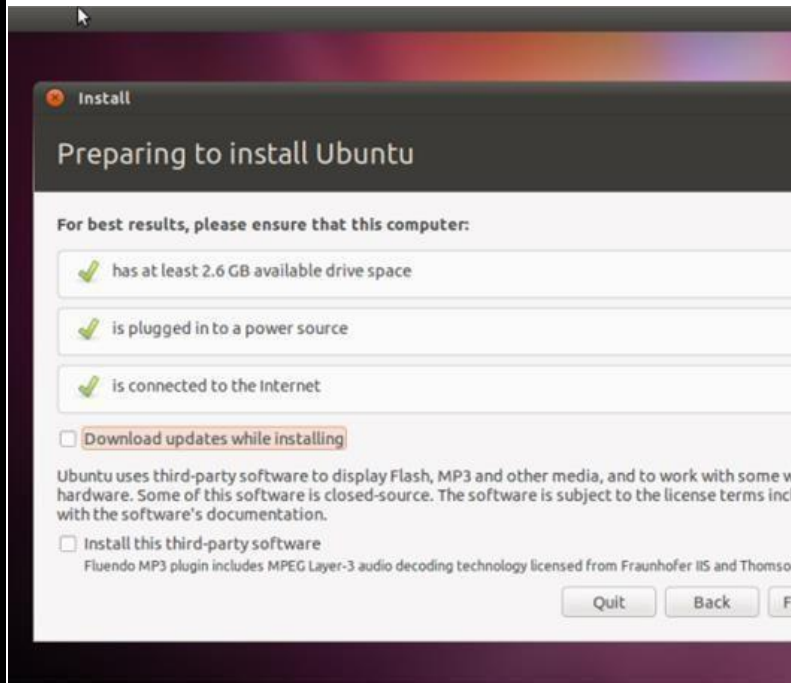

manually option. You can choose the 1st option if you just want linux to exist in your system. Else select second option. Now it will display the free space available for your pc.

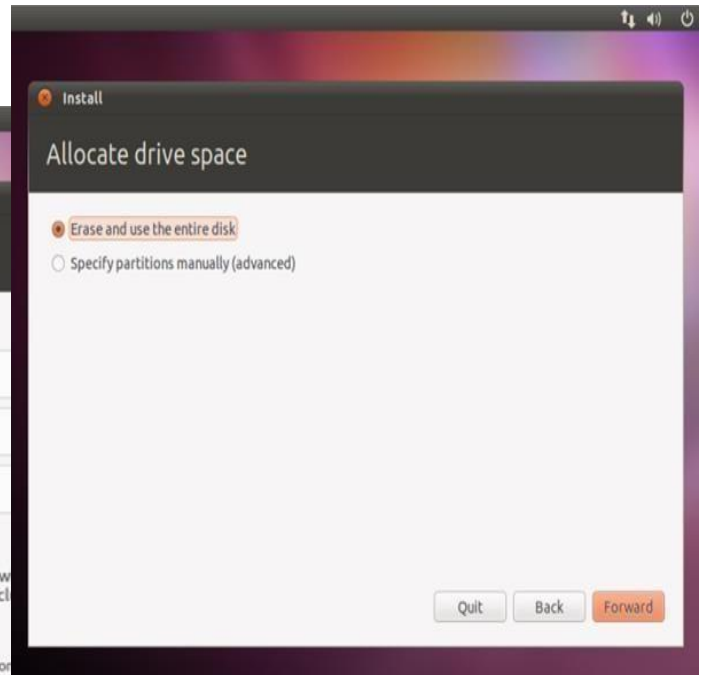


Step 5 : Now you can choose either erase and use entire disk option or **specify partitions**


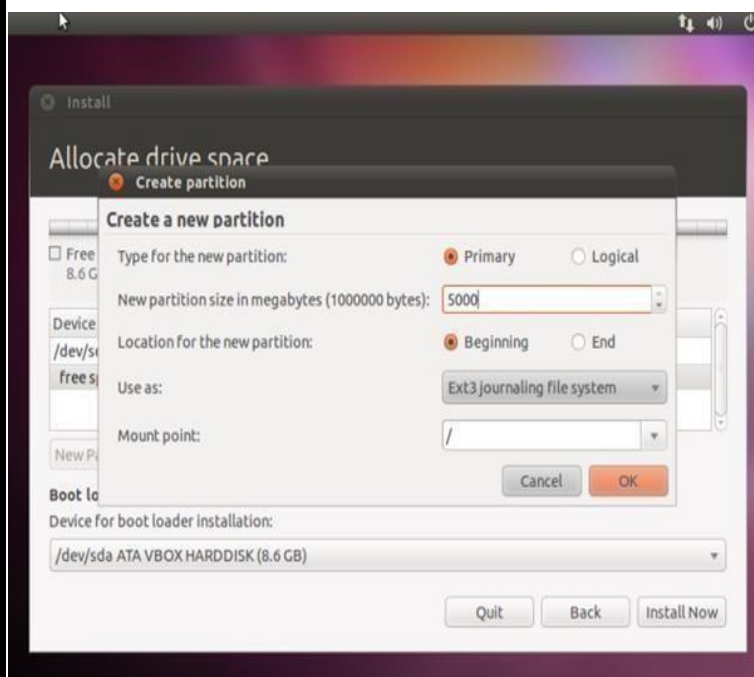


Select free space and click on Add option to create a new partition and choose partition type as primary, size around 70% of the free space available or choose anything like 10,000 or 20,000mb, use as ext3 journaling file system and select mount point as /.


Now again select free space from the table and click add option. Now select size to be around 300mb, use as ext3 journaling file system and select mount point as /boot.

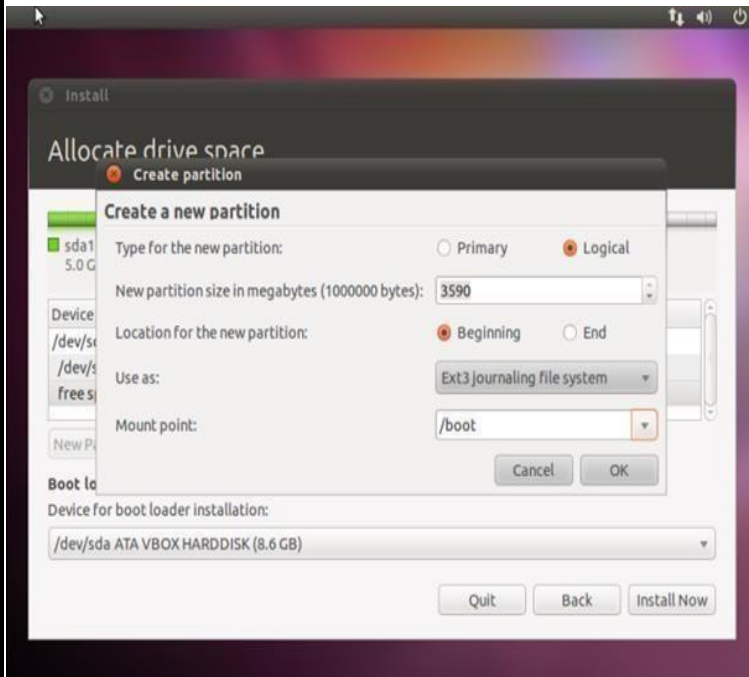


Now again select free space from the table and click add option. Now select size to be around twice the size of your ram that is around 1000 mb if your ram size is 512mb and select use as swap area and click ok.

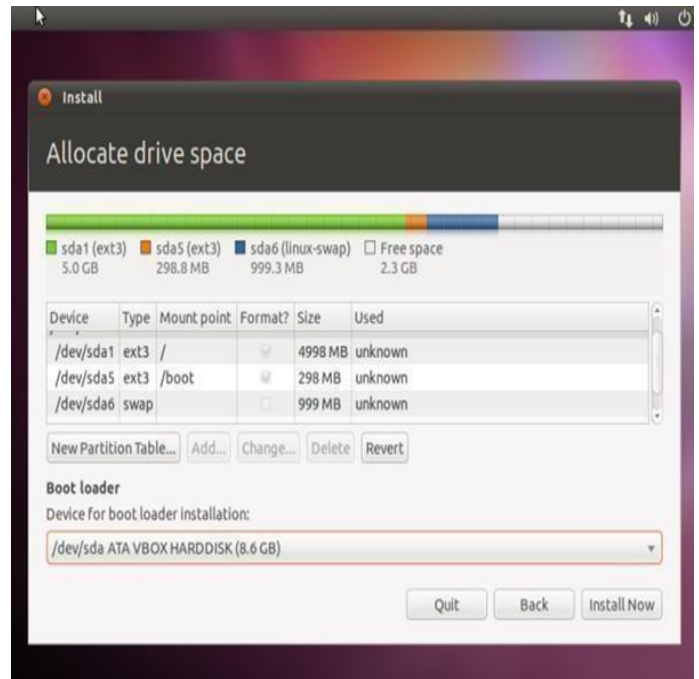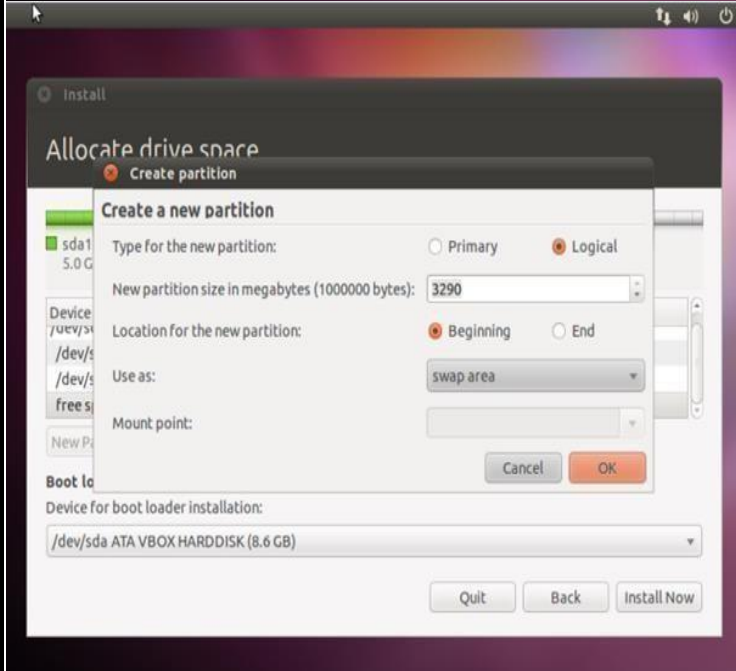


Step 6 : Click Install now button and then the wizard will ask you location. Select your location and click forward.

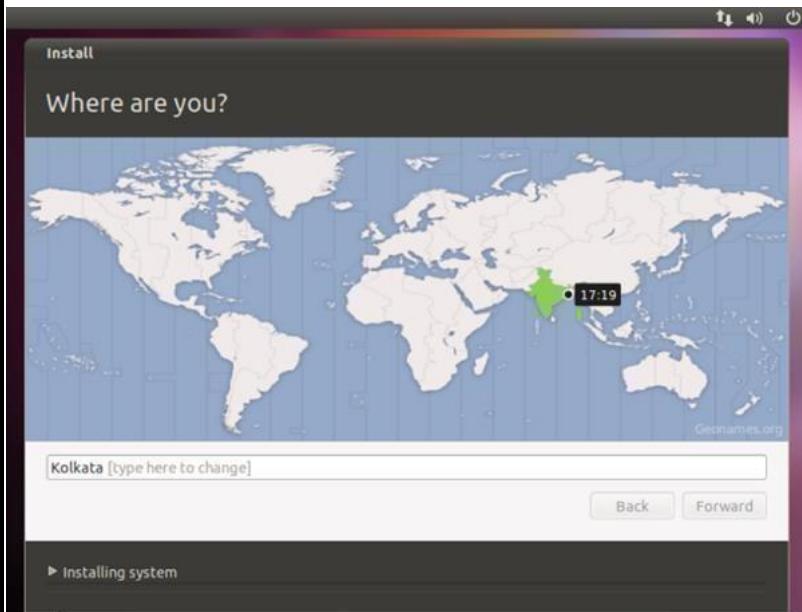


Step 7 : While you are selecting these options wizard will continue to copy files. Now select your desired keyboard layout and click forward.

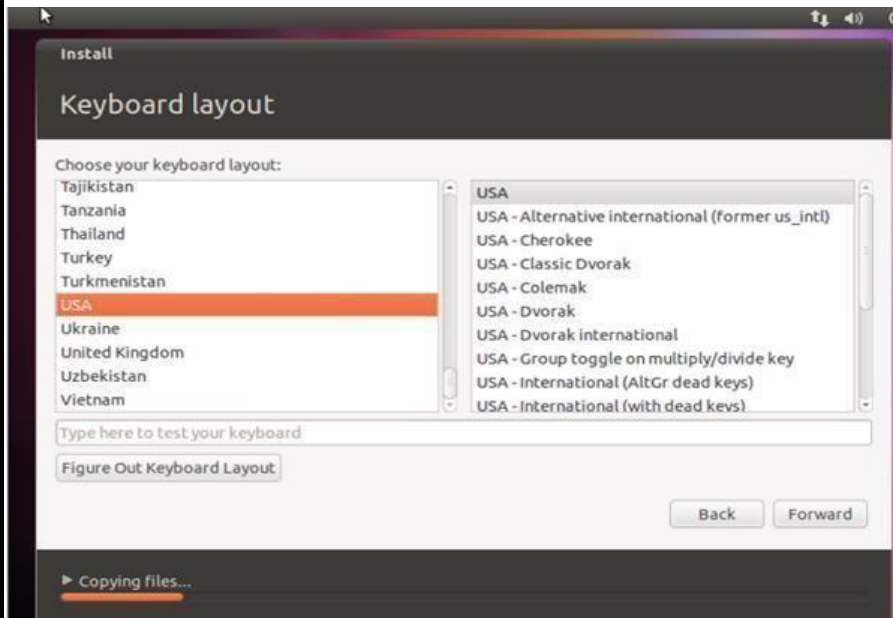



Step 8 : Now fill in the details about yourself. Fill your name, computer name, choose a username and create a password and click forward and let ubuntu copy all the essential files.

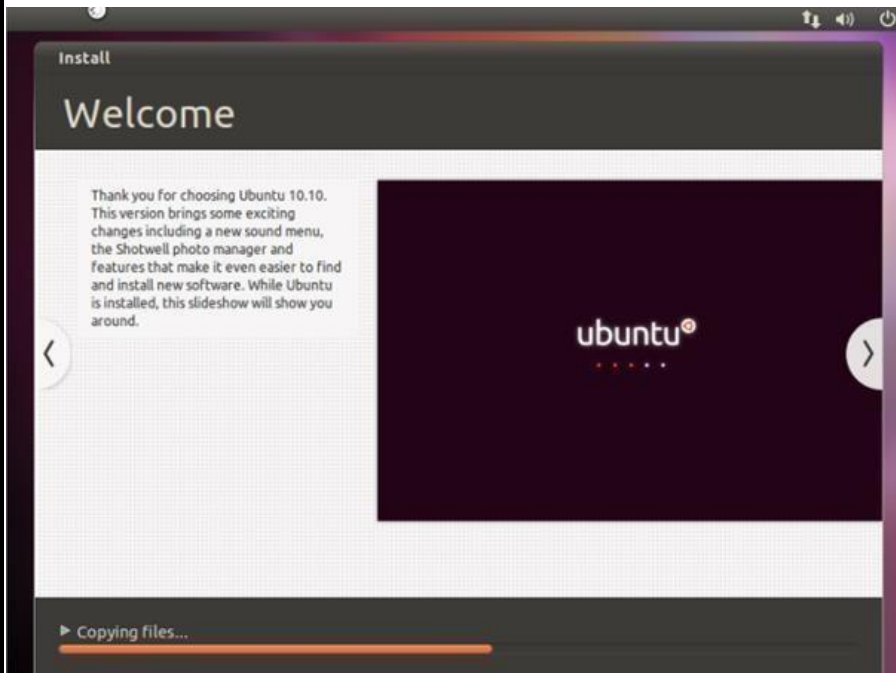

Step 9 : After all files have been copied and installed ubuntu will display a message saying that installation complete and click on restart button to restart your computer. Remove the cd from the cd drive.

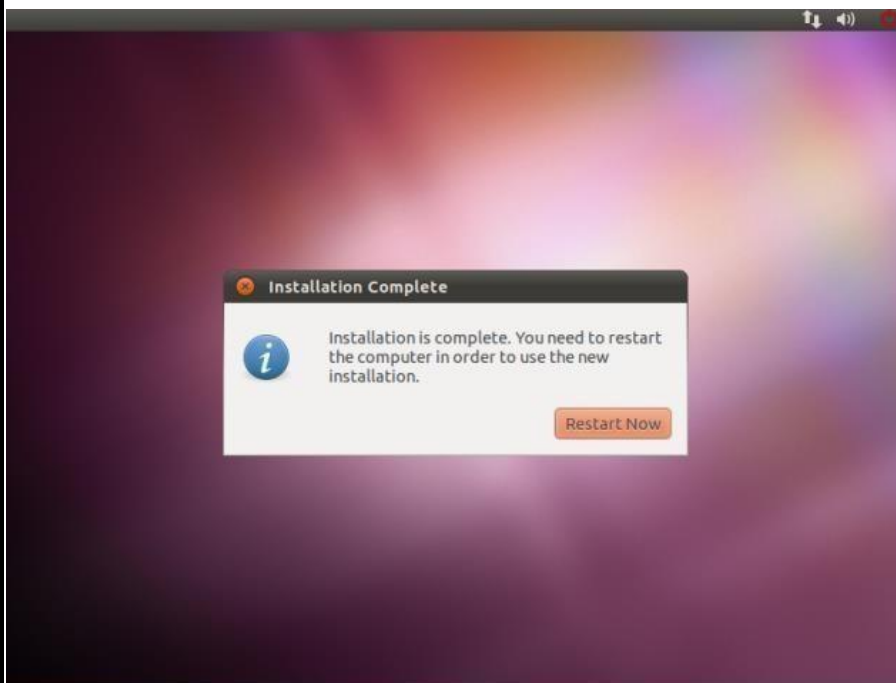

Step 10 : After restarting your pc wait for the ubuntu to load and then it will display the login screen. Choose the user and enter password and click login.

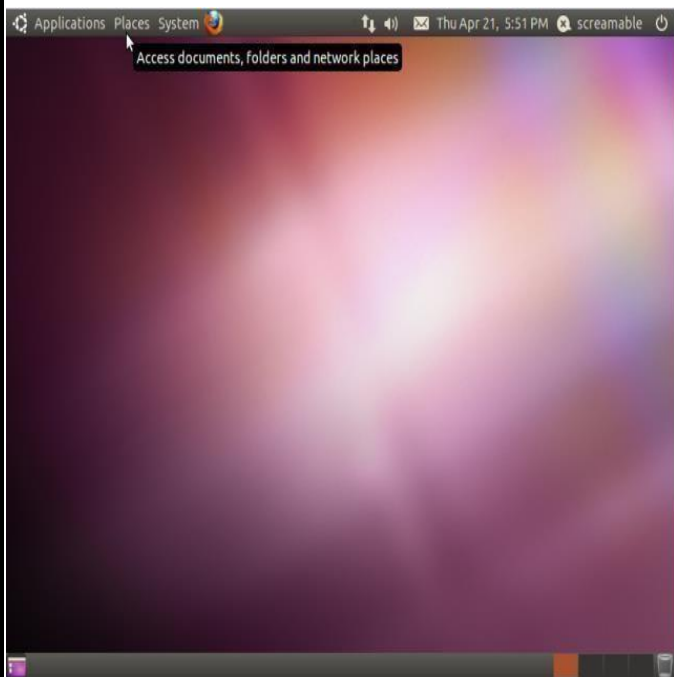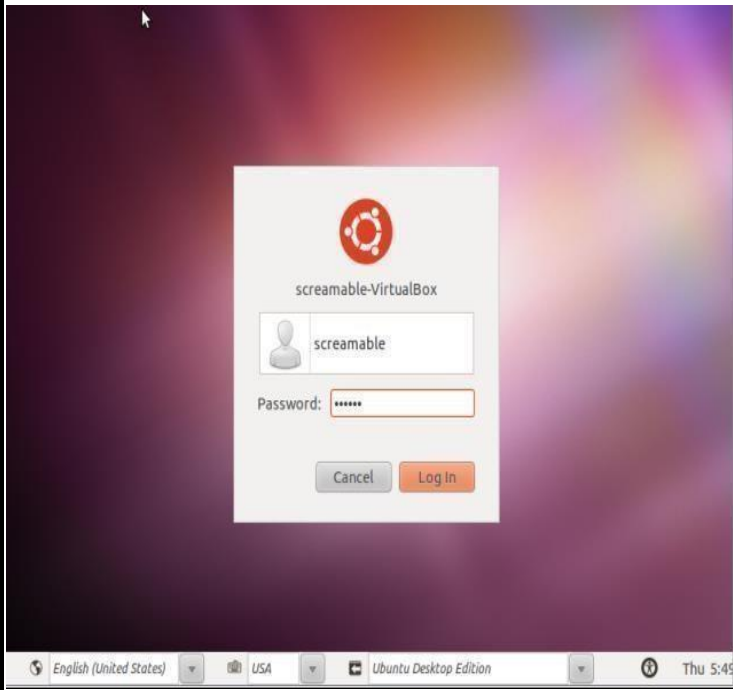

A-Z Index of the **Bash** command line for Linux

a

alias Create an alias •
apropos Search Help manual pages (man -k)
apt-get Search for and install software packages (Debian/Ubuntu) **aptitude** Search for and install software packages (Debian/Ubuntu)
aspell Spell Checker
awk Find and Replace text, database sort/validate/index

b

basename Strip directory and suffix from filenames
bash GNU Bourne-Again SHell
bc Arbitrary precision calculator language
bg Send to background
bind Set or display readline key and function bindings • **break** Exit from a loop •
builtin Run a shell builtin
bzip2 Compress or decompress named file(s)

c

cal Display a calendar
case Conditionally perform a command
cat Concatenate and print (display) the content of files
cd Change Directory
cdfdisk Partition table manipulator for Linux
chattr Change file attributes on a Linux filesystem
chgrp Change group ownership
chmod Change access permissions
chown Change file owner and group
chroot Run a command with a different root directory
chkconfig System services (runlevel)
cksum Print CRC checksum and byte counts
clear Clear terminal screen
cmp Compare two files
comm Compare two sorted files line by line
command Run a command - ignoring shell functions • **continue** Resume the next iteration of a loop •
cp Copy one or more files to another location
cron Daemon to execute scheduled commands
crontab Schedule a command to run at a later time
csplit Split a file into context-determined pieces
curl Transfer data from or to a server
cut Divide a file into several parts

d

date Display or change the date & time
dc Desk Calculator
dd Convert and copy a file, write disk headers, boot records

ddrescue Data recovery tool
declare Declare variables and give them attributes • **df** Display free disk space
diff Display the differences between two files • **diff3** Show differences among three files
dig DNS lookup
dir Briefly list directory contents • **dircolors** Colour setup for `ls`
dirname Convert a full pathname to just a path • **dirs** Display list of remembered directories • **dmesg** Print kernel & driver messages
du Estimate file space usage

e

echo Display message on screen •
egrep Search file(s) for lines that match an extended expression • **eject** Eject removable media
enable Enable and disable builtin shell commands • **env** Environment variables
eval Evaluate several commands/arguments • **exec** Execute a command
exit Exit the shell
expect Automate arbitrary applications accessed over a terminal • **expand** Convert tabs to spaces
export Set an environment variable • **expr** Evaluate expressions

f

false Do nothing, unsuccessfully • **fdformat** Low-level format a floppy disk
fdisk Partition table manipulator for Linux • **fg** Send job to foreground
fgrep Search file(s) for lines that match a fixed string • **file** Determine file type
find Search for files that meet a desired criteria • **fmt** Reformat paragraph text
fold Wrap text to fit a specified width. • **for** Expand *words*, and execute *commands* • **format** Format disks or tapes
free Display memory usage
fsck File system consistency check and repair • **ftp** File Transfer Protocol
function Define Function Macros
fuser Identify/kill the process that is accessing a file

g

gawk Find and Replace text within file(s) • **getopts** Parse positional parameters
grep Search file(s) for lines that match a given pattern • **groupadd** Add a user security group
groupdel Delete a group

groupmod Modify a group
groups Print group names a user is in
gzip Compress or decompress named file(s)
h
hash Remember the full pathname of a nameargument
Output the first part of file(s)
help Display help for a built-in command •**history**
Command History
hostname Print or set system name

i
iconv Convert the character set of a file
id Print user and group id's
if Conditionally perform a command
ifconfig Configure a network interface
install Copy files and set attributes
ip Routing, devices and tunnels

j
jobs List active jobs •
join Join lines on a common field

k
kill Kill a process by specifying its PID
killall Kill processes by name

l
let Perform arithmetic on shell variables •**link** Create a link to a file

ln Create a symbolic link to a file
local Create a function variable •**locate** Find files

logname Print current login name
logout Exit a login shell •

look Display lines beginning with a given string
lpc Line printer control program

lpr Off line print
lprint Print a file
lprintd Abort a print job
lprintq List the print queue

ls List information about file(s)
lsof List open files

m
make Recompile a group of programs
man Help manual

mkdir Create new folder(s)
mkfifo Make FIFOs (named pipes)
mkfile Make a file

mktemp Make a temporary file

more Display output one screen at a time
most Browse or page through a text file

mount Mount a file system **mtools** Manipulate MS-DOS files
mtr Network diagnostics(traceroute/ping)**mv** Move or rename files or directories **mmv** Mass Move and rename (files)

nc Netcat, read and write data across networks **netstat** Networking connections/stats
nice Set the priority of a command or job **nl** Number lines and write files
nohup Run a command immune to hangups **notify-send** Send desktop notifications
nslookup Query Internet name servers interactively

open Open a file in its default application **op** Operator access

passwd Modify a user password **paste** Merge lines of files **ping** Test a network connection **pgrep** List processes by name **ps** Kill processes by name
popd Restore the previous value of the current directory **pr** Prepare files for printing
printcap Printer capability database **printenv** Print environment variables **printf** Format and print data •
ps Process status
pushd Save and then change the current directory **pv** Monitor the progress of data through a pipe **pwd** Print Working Directory

quota Display disk usage and limits **quotacheck** Scan a file system for disk usage

ram ram disk device
rar Archive files with compression **r** Copy files between two machines **read** Read a line from standard input •
readarray Read from stdin into an array variable • **readonly** Mark variables/functions as readonly **reboot** Reboot the system
rename Rename files
renice Alter priority of running processes **remsync** Synchronize remote files via email **return** Exit a shell function
rev Reverse lines of a file **rm** Remove files

rmdir Remove folder(s)

s

screen Multiplex terminal, run remote shells via ssh
scp Secure copy (remote file copy)

sdiff Merge two files interactively
sed Stream Editor

select Accept keyboard input
seq Print numeric sequences

set Manipulate shell variables and functions
sftp Secure File Transfer Program

shift Shift positional parameters
shopt Shell Options

shutdown Shutdown or restart linux
sleep Delay for a specified time
locate Find files

sort Sort text files

source Run commands from a file '.'

split Split a file into fixed-size pieces
ss Socket Statistics

ssh Secure Shell client (remote login program)
su Substitute user identity

sudo Execute a command as another user
sum Print a checksum for a file
suspend Suspend execution of this shell •

t

tail Output the last part of file

tar Store, list or extract files in an archive
tee Redirect output to multiple files

test Evaluate a conditional expression
time Measure Program running time
timeout Run a command with a time

limit
times User and system times

touch Change file timestamps

top List processes running on the system

tput Set terminal-dependent capabilities, color, position
traceroute Trace Route to Host

trap Execute a command when the shell receives a signal •
tr Translate, squeeze, and/or delete characters

true Do nothing, successfully
tsort Topological sort

tty Print filename of terminal on stdin
type Describe a command •

u

ulimit Limit user resources •
umask Users file creation mask
umount Unmount a device

unalias Remove an alias •
uniq Uniquify files
units Convert units from one scale to another
until Execute commands (until error)
uptime Show uptime
useradd Create new user account
userdel Delete a user account
usermod Modify user account
users List users currently logged in

V
V Verbosely list directory contents (`ls -l -b`)
vdir Verbosely list directory contents (`ls -l -b`)Text Editor
vi Report virtual memory statistics
vmstat

W
w Show who is logged on and what they are doing
wait Wait for a process to complete • Execute/display a program periodically
watch
wc Print byte, word, and line counts
whereis Search the user's \$path, man pages and source files

for a program

which Search the user's \$path for a program file
while Execute commands


who Print all usernames currently logged in
whoami Print the current user id and name (`id-un`)

wget Retrieve web pages or files via HTTP, HTTPS orFTP
write Send a message to another user

x
xargs Execute utility, passing constructed argument list(s)
xdg-open Open a file or URL in the user's preferredapplication.
xz Compress or decompress .xz and .lzma files
yes Print a string until interrupted
zip Package and compress (archive) files.
. Run a command script in the current shell
!! Run the last command again
Comment / Remark

Procedure to connect to LINUX(putty)

Step 1:click on putty icon available on desk top. A window is opened

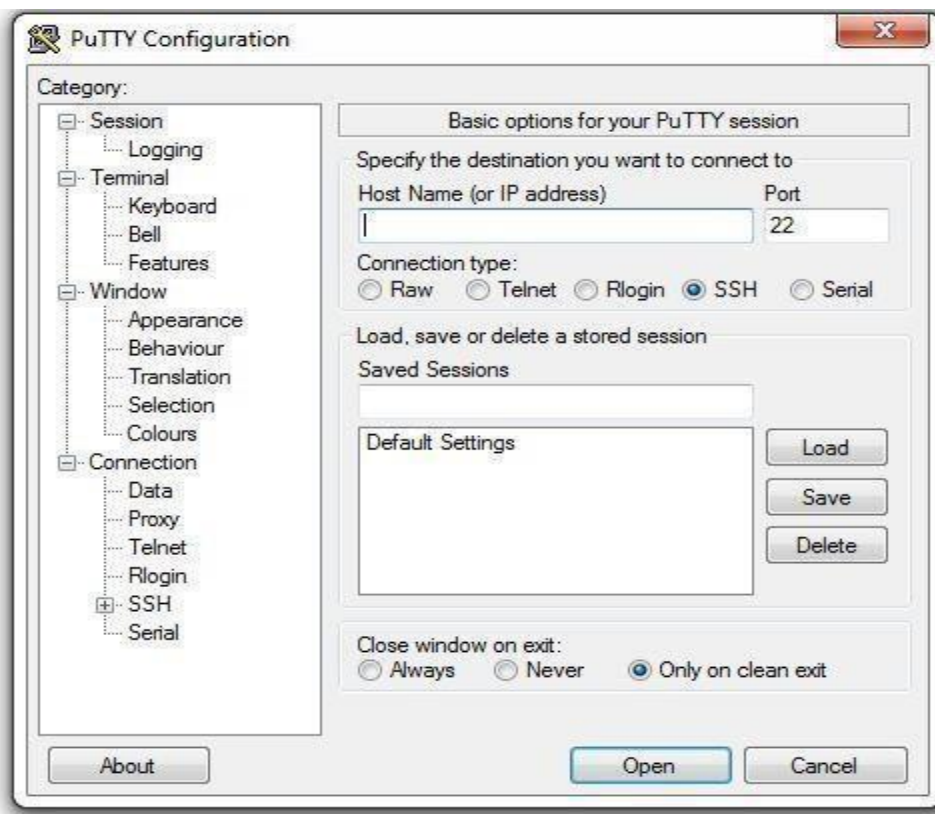

Step 2:fill in ip address of linux server and click open



Step 3: provide login and password (nothing is displayed on screen while typing password)

Step 4: change the default password at your first login

EXPERIMENT NO: 1. b)

Aim: Write a Shell Script that accepts a file name, starting and ending line numbers as Arguments and displays all lines between the given line numbers.

ALGORITHM:

Step 1: Create a file with 5-6 lines of data

File can be created by vi sample.dat or cat sample.dat

Step 2: Now write a shell script with

vi 1.sh

step3: Check the no of arguments for shell script

if 0 arguments then print no arguments

else if 1 argument then print 1 argument

else if 2 arguments then print 2 arguments

else check for file is there or not (if file is not there print file does not exist)

1 else sed -ne "\$2,\$3" p \$1

sed is one of powerful filter (stream editor)

-e default option (script on command line)

-n suppresses automatic output

\$2 first line number passed \$3 2nd line number passed

p is a print command (prints current content to the pattern space).

\$1 is name of file from which we are printing data between the line numbers.

Step 4: top

Script Name: 1sh

```
#!/bin/bash
```

```
if [ $# -lt 3 ]
```

```
then
```

```
    echo "To execute you have to enter 3 arguments in command line in following order..."
```

```
    echo " File Name ,starting line number and ending line number..."
```

```
else
```

```
    sed -n $2,$3p $1
```

```
fi
```

Commands used in the script:

Sed command:

stream editor for filtering and transforming text

1. Replacing or substituting string

Sed command is mostly used to replace the text in a file. The below simple sed command replaces the word "unix" with "linux" in the file.

```
$sed 's/unix/linux/' file.txt
```

2. Replacing the nth occurrence of a pattern in a line

```
$sed 's/unix/linux/2' file.txt
```

Replaces 2nd occurrence

3. printing lines for a given range

```
$sed -n 1,5p hello.txt Prints first 5 lines in the file hello.txt
```

nl command:

The nl utility in Linux is used to give number lines of a file on console.

Example:

```
$ nl sort.txt
1    UK
2    Australia
3    Newzealand
4    Brazil
5    America
```

Execution:

check how many lines of data in the input file

```
root@localhost sh)# cat hello.txt | nl
```

```
1 abc
2 def
3 ghi
4 abc
5 abc
6 cccc
```

Executing Shell script:

```
run1:
```

```
[root@localhost sh)# sh 1.sh abc1.txt 2 4
```

```
def
ghi
abc
```

compare with the data in the file and output

Viva Questions

1. What is a shell script?
2. How to find current shell name
3. How to switch to another shell
4. How to execute shell Script

Exercises:

S.No.	Task
1	Write a shell script to count no of character in a file ,prompt for inputfile
2	Write a shell script to count no of character in a file name given incommand prompt
3	Write a shell script to perform arithmetic operation using casestatement

EXPERIMENT NO: 1. c)

AIM: Write a shell script that deletes all lines containing the specified word in one or more files Supplied as arguments to it.

ALGORITHM:

Step 1: Create a file with 5-6 lines of data
Create the 2 file f1 and f2 as vi s1 and vi s2
Step2: Now write a shell script with
vi 2.sh
step3: Check the no of arguments for shell script
if 0 arguments then print no arguments
else pattern=\$1(word will be stored in pattern)
for fname in \$*
for every filename in given files
if it is a file if [-f \$fname] then
print DELETING \$pattern FROM
\$fname sed '/\$pattern/d' \$fname
sed acts as filter if word is a file in any line that will be deleted
'/' is used to represent regular expressions
'/d' is a delete command in sed
else print file NOT FOUND

Script name: 2.sh

```
#!/bin/bash
if [ $# -lt 2 ]then
    echo "Enter atleast two files as input in command line"
else
    printf "enter a word to find:"
    read word
    for f in $*
    do
        printf "\n In File $f:\n"
        sed /$word/d $f
    done
fi
```

Execution:

```
run1:
check data in input files
[root@localhost sh]# cat abc1.txt
abc
def
ghi
abc
abc
cccc
[root@localhost sh]# cat abc2.txt
abc
```

```
def
ghi
abc
abc
cccc
Executing shell script
[root@localhost sh]# sh 2.sh abc1.txt abc2.txt
enter a word to find:abc
In File abc1.txt:
def
ghi
cccc
In File abc2.txt:
def
ghi
cccc
```

Expected output:

Displays lines from files s1 s2 after deleting the word hi

Viva Questions

- 1.Explain various loops in shell script
- 2.Explain grep
- 3.Explain egep
- 4.Explain fgep
5. .Explain sed

Exercises:

S.No.	Task
1	Write a shell script to count occurrence of a word in a file
2	Write a shell script to print line numbers in which a particular word has occurred where word is provides as input.

EXPERIMENT NO: 1. d)

Aim: Write a shell script that displays a list of all files in the current directory to which the user has read, write and execute permissions.

ALGORITHM:

Step1: selects list of files from present working directory

Step 2:check for each file wither its is has read, write and execute permissions if true goto step 3

Step 3: print file

Step 4 :stop

Script name: 3.sh

```
#!/bin/bash
echo "List of Files which have Read, Write and Execute Permissions in Current Directory are..."
for file in *
do
    if [ -r $file -a -w $file -a -x $file ]
    then
        echo $file
    fi
done
```

Execution:

```
$sh 3.sh
```

Expected output:

by executing above shell script you will get all files which has read ,write and execute Permissions in current working directory

sample output

```
[root@localhost sh]# sh 3.sh
```

```
List of Files which have Read, Write and Execute Permissions in Current Directory are...
```

```
5.sh
```

```
a.out
```

Viva Questions:

- 1.Display all files in a directory
- 2.how to use chmod
- 3.How to change file permissions

Exercises:

S.No.	Task
1	Write a shell script to display all file with read or write or executepermissions provide a selection menu
2	Write a comparison report for using chmod using symbolicrepresentation or octal number representation
3	Write a shell script to count no of file in current directory with fullpermissions

EXPERIMENT NO: 2.a)

Aim:-Write a shell script that receives any number of file names as arguments checks if every argument supplied is a file or directory and reports accordingly. Whenever the argument is a file it reports no of lines present in it

ALGORITHM:

step 1: if arguments are less than 1 print Enter at least one input file name and goto step 9
Step 2: selects list a file from list of arguments provided in command line
Step 3: check for whether it is directory if yes print is directory and goto step 9
step 4: check for whether it is a regular file if yes goto step 5 else goto step 8
Step 5: print given name is regular file
step 6: print No of lines in file
step 7: goto step
step 8: print not a file or adirectory
step 9: stop

Script name: 4.sh

```
#!/bin/bash
if [ $# -lt 1 ]
then
    echo "Enter at least one input file name"
else
    for i in $*
    do
        if [ -d $i ]
        then
            echo " given name is directory"
        elif [ -f $i ]
        then
            echo " given name is file: $i"
            echo " No of lines in file are : `wc -l $i`"
        else
            echo "given name is not a file or a directory"
        fi
    done
fi
```

Execution:

provide two file names as input one a regular file and other directory
for example abc1.txt a text file as first argument and vazralu a directory as second argument

Run1:

```
[root@localhost sh]# sh 4.sh abc1.txt vazralu
given name is file: abc1.txt
No of lines in file are : 7 abc1.txt
```

vazralu is directory

```
run 2:[root@localhost sh]# sh 4.sh abc1.txt abc2.txt
given name is file: abc1.txt
No of lines in file are : 7 abc1.txt
given name is file: abc2.txt
No of lines in file are : 7 abc2.txt
```

Viva Questions:

1. What is an internal command in Linux?

Internal commands are also called shell built-in commands. Example: cd,fg. Since these are shell built-in, no process is created while executing these commands, and hence are considered to be much faster.

2. x and y are two variables containing numbers? How to add these 2 numbers?

```
$ expr $x + $y
```

3. How to add a header record to a file in Linux?

```
$ sed -i '1i HEADER' file
```

4. How to find the list of files modified in the last 30 mins in Linux?

```
$ find . -mmin -30
```

5. How to find the list of files modified in the last 20 days?

```
$ find . -mtime -20
```

Exercises:

S.No.	Task
1	Write a shell script to count no of regular files in the current workingdirectory
2	Write a shell script to display list of currently logged users

EXPERIMENT NO: 2. b)

Aim:-Write a shell script that accepts a list of file names as its arguments, counts and reports the occurrence of each word that is present in the first argument file on other argument files.

ALGORITHM:

step1: Check the no of arguments for shell script
if 0 arguments then print no arguments
step2:else translate each word in the first file is to be on separate line
which will be stored in temp file
step3: for i in \$*
for every filename in given files
step 4: translate each word in the file is to be on separate line
which will be stored in temp1 file
step5: count no of lines in temp file assign it to j
step6: initialize j=1
step 7: while i< j
extract the line that are common in both the file by using
head and tail commands
then apply the filter grep to count and print the lines
which are common to files
increment j
step 8: stop

Script name:5.sh

```
#!/bin/bash
echo "no of arguments $#"  
if [ $# -le 2 ]  
then  
    echo "Error : Invalid number of arguments."  
    exit  
fi  
str=`cat $1 | tr '\n' ' '`  
for a in $str  
do  
    echo "in file $a"  
    echo "Word = $a, Count = `grep -c "$a" $2`"  
done
```

Execution and output:

```
check data in abc1.txt file  
[root@localhost sh]# cat abc1.txt  
abc  
def  
ghi  
abc  
abc
```

```

cccc
check data in abc1.txt file
[root@localhost sh]# cat abc2.txt
abc
def
ghi
abc
abc
cccc

```

executing script

```

[root@localhost sh]# sh 5.sh abc1.txt abc2.txt
Word = abc, Count = 3
Word = def, Count = 1
Word = ghi, Count = 1
Word = abc, Count = 3
Word = abc, Count = 3
Word = cccc, Count = 1

```

Viva Questions

1. What is Shell Scripting ?

Shell scripting, in Linux or Unix, is programming with the shell using which you can automate your tasks. A shell is the command interpreter which is the interface between the User and the kernel. A shell script allows you to submit a set of commands to the kernel in a batch. In addition, the shell itself is very powerful with many properties on its own, be it for string manipulation or some basic programming stuff.

2. The command "cat file" gives error message "--bash: cat: Command not found". Why?

It is because the PATH variable is corrupt or not set appropriately. And hence the error because the cat command is not available in the directories present PATH variable.

3. How to find the length of a string in Linux?

```
$ x="welcome" $ echo ${#x} 7
```

4. What are the different timestamps associated with a file?

Modification time:- Refers to the time when the file is last modified.

Access time :- The time when the file is last accessed.

Changed time :- The time when the attributes of the file are last changed.

5. How to get the list of files alone in a directory in Linux?

```
$ ls -lrt | grep ^-
```

Exercises:

S.No.	Task
1	Write a shell script to print prime numbers
2	Write a shell script to print Fibonacci numbers

EXPERIMENT NO: 3. a)

Aim:-Write a shell script to list all of the directory files in a directory.

Algorithm:

Step1: enter the name of the directory

 Read dir

Step2: if it is a directory

 Then list the files present in that directory

 By using ls command with -p option to list all directory files in a given directory

Step 3: else enter the directory name

Step 4: stop

Script name: 6.sh

```
#!/bin/bash
echo " Enter dir name: "
read dir
if [ -d $dir ]
then
    printf " Files in Directory $dir are...\n`ls $dir`"
else
    echo " Dir does not exist"
fi
```

Execution and output:

```
[root@localhost sh]# sh 6.sh
```

```
Enter dir name:
```

```
japs
```

```
Files in Directory japs are...
```

```
abc1.txt
```

```
abc2.txt
```

```
ls-l.c
```

```
prg5
```

```
s1
```

Viva Questions

1. A string contains a absolute path of a file. How to extract the filename alone from the absolute path in Linux?

```
$ x="/home/guru/temp/fl.txt"
```

```
$ echo $x | sed 's^.*\/^^'
```

2. How to find all the files created after a pre-defined date time, say after 10th April 10AM?

This can be achieved in 2 steps:

1. Create a dummy file with the time stamp, 10th April 10AM.

2. Find all the files created after this dummy file.

```
$ touch -t 1004101000 file
```

```
$ find . -newer file
```

3. The word "Unix" is present in many .txt files which is present across many files and also files present in sub directories. How to get the total count of the word "Unix" from all the .txt files?

```
$ find . -name *.txt -exec grep -c Unix '{}'\; | awk '{x+=$0;}END{print x}'
```

Exercises:

S.No.	Task
1	How to find the files modified exactly before 30minutes? \$ find . -mmin 30
2	How to print the contents of a file line by line in Linux?

EXPERIMENT NO: 3. b)

Aim:-Write a shell script to find factorial of a given number.

ALGORITHM

Step 1: read any number to find factorial

Step 2: initialize fact=1 and i=1

Step 3: while i less than

do

fact=fact* i

i=i+1

done

step 4:print fact

step 5:stop.

Script Name:7.sh

```
#!/bin/bash
```

```
echo "Factorial Calculation Script. .."
```

```
echo "Enter a number: "
```

```
read f
```

```
fact=1
```

```
factorial=1
```

```
while [ $fact -le $f ]
```

```
do
```

```
    factorial=`expr $factorial \* $fact`
```

```
    fact=`expr $fact + 1`
```

```
done
```

```
echo "Factorial of $f = $factorial"
```

Execution and Output:

```
[root@localhost sh]# sh 7.sh
```

```
Factorial Calculation Script....
```

```
Enter a number: 4
```

```
Factorial of 4 = 24
```

Exercises:

S.No.	Task
1	Write a shell script to find sum of first n natural numbers
2	Write a shell script to find largest of given three numbers

EXPERIMENT NO: 4. a)

Aim:-write an awk script to count number of lines in a file that does not contain vowels

ALGORITHM

Step 1: create a file with 5-10 lines of data

Step 2: write an awk script by using grep command to filter the lines that do not contain vowels

```
awk ' $0 !~/aeiou/ {print $0}' file1
```

step3: count=count+1

step4:print count

step5:stop

Awk script name:nm.awk

```
BEGIN{  
  {  
    If($0 !~/[aeiou AEIOU]/)  
    wordcount+=NF  
  }  
  END  
  {  
    print "Number of Lines are", wordcount  
  }  
}
```

input file for awk script:data.dat

```
bcdfghj  
abcdfghj  
bcdfghj  
ebcdfghj  
bcdfghj  
ibcdfghj  
bcdfghj  
obcdfghj  
bcdfghj  
ubcdfghj
```

Executing the script:

```
[root@localhost awk]# awk -f nm.awk data.dat
```

```
bcdfghj  
bcdfghj  
bcdfghj  
bcdfghj  
bcdfghj
```

Number of lines are 5

Exercises:

S.No.	Task
1	Write an awk script to find square root of a given number
2	Write an awk script to find maximum of two numbers , read input from keyboard

EXPERIMENT NO: 4. b)

Aim:-write an awk script to find the no of characters ,words and lines in a file

ALGORITHM

Step 1: create a file with 5 to10 lines of data

Step 2: write an awk script

 find the length of file

 store it in chrcnt

step3: count the no of fields (NF), store it in wordcount

step4: count the no of records (NR), store it in NR

step5: print chrcnt,NRwordcount

step6: stop

Awk script name:nc.awk

```
BEGIN{  
  {  
    print len=length($0),"\t",$0  
    wordcount+=NF  
    chrcnt+=len  
  }  
END {  
  print "total characters",chrcnt  
  print "Number of Lines are",NR  
  print "No of Words count:",wordcount  
}
```

input data file name:data.dat

```
bcdfghj  
abcdfghj  
bcdfghj  
ebcdfghj  
bcdfghj  
ibcdfghj  
bcdfghj  
obcdfghj  
bcdfghj  
ubcdfghj
```

Executing the script:

```
[root@localhost awk]# awk -f nc.awk data.dat
```

```
7 bcdfghj  
8 abcdfghj  
7 bcdfghj  
8 ebcdfghj  
7 bcdfghj
```

```
8 ibcdfghj
7 bcdfghj
8 obcdfghj
7 bcdfghj
8 ubcdfghj
total characters 75
Number of Lines are 10
No of Words count: 10
```

VIVA QUESTIONS:

1. How to find the last modified file or the newest file in a directory?

```
$ ls -lrt | grep ^- | awk 'END{print $NF}'
```

2. How to access the 10th command line argument in a shell script in Linux?

\$1 for 1st argument, \$2 for 2nd, etc... For 10th argument, \${10}, for 11th, \${11} and so on.

3. How to find the sum of all numbers in a file in Linux?

```
$ awk '{x+=$0}END{print x}' file
```

4. How to delete a file which has some hidden characters in the file name?

Since the rm command may not be able to delete it, the easiest way to delete a file with some hidden characters in its name is to delete it with the find command using the inode number of the file.

```
$ ls -li
total 32
9962571 -rw-r--r-- 1 guru users 0 Apr 23 11:35
$ find . -inum 9962571 -exec rm '{}'\;
```

5. Using the grep command, how can you display or print the entire file contents?

```
$ grep '.*' file
```

6. What is the difference between a local variable and environment variable in Linux?

A local variable is the one in which the scope of the variable is only in the shell in which it is defined. An environment variable has scope in all the shells invoked by the shell in which it is defined.

EXPERIMENT NO: 5

Aim: Implement in c language the following Unix commands using systemcalls a)cat b)ls c)mv

a) AIM:- Write a c program to implement **cat command** using system calls

Description:

cat COMMAND: cat linux command concatenates files and print it on the standard output.

SYNTAX:

cat [OPTIONS] [FILE]...

OPTIONS:

- A Show all.
- b Omits line numbers for blank space in the output.
- e A \$ character will be printed at the end of each line prior to a new line.
- E Displays a \$ (dollar sign) at the end of each line.
- n Line numbers for all the output lines.
- s If the output has multiple empty lines it replaces it with one empty line.
- T Displays the tab characters in the output.
- v Non-printing characters (with the exception of tabs, new-lines & form-feeds) are printed visibly.

Operations With cat Command:

1. To Create a new file:

\$cat > file1.txt

This command creates a new file file1.txt. After typing into the file press control+d (^d) simultaneously to end the file.

2. To Append data into the file:

\$cat >> file1.txt

To append data into the same file use append operator >> to write into the file, else the file will be overwritten (i.e., all of its contents will be erased).

3. To display a file:

\$cat file1.txt

This command displays the data in the file.

4. To concatenate several files and display:

\$cat file1.txt file2.txt

The above cat command will concatenate the two files (file1.txt and file2.txt) and it will display the output in the screen. Some times the output may not fit the monitor screen. In such situation you can print those files in a new file or display the file using less command.

cat file1.txt file2.txt | less

5. To concatenate several files and to transfer the output to another file.

\$cat file1.txt file2.txt > file3.txt

In the above example the output is redirected to new file file3.txt. The cat command will create new file file3.txt and store the concatenated output into file3.txt.

Algorithm:

Step 1:Start
Step 2:read arguments from keyboard at command line
Step 3:if no of arguments are less than two print ENTER CORRECT ARGUMENTS
 Else goto step 4
Step4:read the date from specified file and write it to destination file
Step 5 :stop

Program file name:catdemo.c

```
#include<stdio.h>
#include<sys/types.h>
#include<stdlib.h>
#include<fcntl.h>
#include<sys/stat.h>
int main(int argc,char *argv[])
{
int fd,n;
char buff[512];
if(argc!=2)
printf("ENTER CORRECT ARGUMENTS :");
if((fd=open(argv[1],4))<0)
{
printf("ERROR");
return 0;
}
while(n=read(fd,buff,sizeof(buff))>0)
write(1,buff,n);
}
```

b) **AIM:-**Write a c program to implement **ls command** using systemcalls

Description:

ls command is used to list the files present in a directory

Algorithm:

Step 1. Start.
Step 2. open directory using opendir() system call.
Step 3. read the directory using readdir() system call.
Step 4. print dp.name and dp.inode .
Step 5. repeat above step until end of directory.
Step 6: Stop.

Program name: lsdemo.c

```
#include<stdio.h>
#include<dirent.h>
void quit(char*,int);
int main(int argc,char **argv )
{
```

```

    DIR *dirop;
    struct dirent *dired;
    if(argc!=2)
    {
        printf("Invalid number of arguments\n");
    }
    if((dirop=opendir(argv[1]))==NULL)
        printf("Cannot open directory\n");
    while((dired=readdir(dirop))!=NULL)
        printf("%10d %s\n",dired->d_ino,dired->d_name);
    closedir(dirop);
}

```

c) **AIM:** write a c program that simulates **mv command** (using system calls)

Description:

mv command is used to move or rename a file

synatax:

```
mv file1 file2
```

here file1 is renamed as file2

Algorithm:

Step 1: Start

Step 2: open an existed file and one new open file using open() system call

Step 3: read the contents from existed file using read() system call

Step 4: write these contents into new file using write system call using write() system call

Step 5: repeat above 2 steps until eof

Step 6: close 2 file using fclose() system call

Step 7: delete existed file using unlink() system

Step 8: Stop.

Program File name: mvdemo.c

```

#include<stdio.h>
#include<string.h>
int main(int argc ,char *argv[])
{
    int r,i;
    char p[20],q[20];
    if(argc<3)
        printf("improper arguments\n file names required\n");
    else
        if( argc==3)
        {
            printf("\n%s\n",argv[1],argv[2]);
            r=link(argv[1],argv[2]);
            printf("%d\n",r);
            unlink(argv[1]);
        }
}

```



```
    }  
else  
{  
    for(i=1;i<argc-1;i++)  
    {  
        strcpy(p,argv[argc-1]);  
        strcat(p,"/");  
        strcat(p,argv[i]);  
        printf("%s%s\n",argv[i],p);  
        link(argv[i],p);  
        unlink(argv[i]);  
    }  
}  
}
```

EXPERIMENT NO: 6

Aim: Write a C program that takes one or more file/directory names as command line input and reports following information

A) File Type

B) Number Of Links

c) Time of last Access

D) Read, write and execute permissions

Algorithm:

Step 1: start

Step 2: Declare struct stat a

Step 3: read arguments at command line

Step 4: set the status of the argument using stat(argv[i], &a);

Step 5: Check whether the given file is Directory file by using S_ISDIR(a.st_mode)
if it is a directory file print Directory file

Else

print is Regular file

Step 6: print number of links

Step 7: print last time access

Step 8: Print Read, write and execute permissions

Step 9: stop

Program File name: 13.c

```
#include<stdio.h>
#include<sys/stat.h>
#include<time.h>
int main(int argc, char *argv[])
{
    int i, j;
    struct stat a;
    for (i=1; i<argc; i++)
    {
        printf("%s : ", argv[i]);
        stat(argv[i], &a);
        if(S_ISDIR(a.st_mode))
        {
            printf("is a Directory file\n");
        }
        else
        {
            printf("is Regular file\n");
        }

        printf("*****File Properties*****\n");
        printf("Inode Number: %d\n", a.st_ino);
        printf("UID: %o\n", a.st_uid);
        printf("GID: %o\n", a.st_gid);
        printf("No of Links: %d\n", a.st_nlink);
        printf("Last Access time: %s", asctime(localtime(&a.st_atime)));
    }
}
```

```
printf("Permission flag:%o\n",a.st_mode%512);
printf("size in bytes:%d\n",a.st_size);
printf("Blocks Allocated:%d\n",a.st_blocks);
printf("Last modification time %s\n",ctime(&a.st_atime));
}
}
```

Exercises:

S.No.	Task
1	write a c program that simulates mkdir command using systemcalls
2	write a c program that simulates rmdir command using systemcalls

EXPERIMENT NO: 7

Aim: Write a C program to list every file in directory, its inode number and file name

Algorithm:

Step 1: Start

Step 2: Read Directory name

Step 3: open the directory

Step 4: print file name and Inode number of each file in the directory

Step 5: Stop

Program file name: inode.c

```
#include<fcntl.h>
#include<stdio.h>
#include<dirent.h>
#include<sys/stat.h>
int main(int argc,char*argv[])
{
    DIR *dirop;
    struct dirent *dired;
    if(argc!=2)
    {
        printf("Invalid number of arguments\n");
    }
    else if((dirop=opendir(argv[1]))==NULL)

        printf("Cannot open Directory\n");
    else
    {
        printf("%10s %s \n","Inode","File Name");
        while((dired=readdir(dirop))!=NULL)
            printf("%10d %s\n",dired->d_ino,dired->d_name);
        closedir(dirop);
    }
    return 0;
}
```

Exercises:

S.No.	Task
1	Write a c program to test whether the given file is seekable or not
2	Write a c program to for requesting and releasing lock

EXPERIMENT NO: 8 a)

Aim: Write a C program to create child process and allow parent process to display “parent” and the child to display “child” on the screen

Algorithm:

- Step 1: start
- Step2: call the fork() function to create a child process
fork function returns 2 values
- step 3: which returns 0 to child process
- step 4: which returns process id to the parent process
- step 5: stop

Program file name: 16.c

```
#include<stdio.h>
#include<stdlib.h>
#include<unistd.h>
int main()
{
int pid,pid1,pid2;
pid=fork();
if(pid==-1)
{
printf("ERROR IN PROCESS CREATION \n");
exit(0);
}
if(pid!=0)
{
pid1=getpid();
printf("\n the parent process ID is %d", pid1);
}
else
{
pid2=getpid();
printf("\n the child process ID is %d\n", pid2);
}
}
```

Execution:

```
[root@dba ~]# cc -o 16 16.c
[root@dba ~]# ./16
```

```
the child process ID is 4485
the parent process ID is 4484
```

EXPERIMENT NO: 8 b)

Aim: Write a C program to create zombie process

Algorithm: Step 1: call fork function to create a child process
Step 2: if fork() > 0
Then creation of Zombie
By applying sleep function for 10 seconds
Step 3: now terminate the child process
Step 4: exit status child process not reported to parent
Step 5: status any process which is zombie can be known by
Applying ps(1) command
Step 6: stop

Program file name: 17.c

```
#include <stdio.h>
#include <stdlib.h>
int main()
{
    int pid;
    pid=fork();
    if(pid == 0)
    {
        printf("I am child my pid is %d\n",getpid());
        printf("My parent pid is:%d\n",getppid());
        exit(0);
    }
    else
    {
        printf("I am parent, my pid is %d\n",getpid());
        sleep(100);
        exit(0);
    }
}
```

Execution:

To see zombie process, after running the program, open a new terminal Give this command \$ps -el|grep a.out

First terminal

Compilation:

```
[root@dba ~]# cc 17.c
```

Executing binary

```
[root@dba ~]# ./a.out
```

```
I am child my pid is 4732
```

```
My parent pid is:4731
```

```
I am parent, my pid is 4731
```

Checking for zombie process. Z means zombie process

Second terminal

```
[root@dba ~]# ps -el|grep a.out
```

```
0 S  0 4731 4585 0 77  0 - 384 - pts/3  00:00:00 a.out
```

```
1 Z  0 4732 4731 0 77  0 -  0 exit pts/3  00:00:00 a.out <defunct>
```

Exercises:

S.No.	Task
1	Write a program to create zombie process and then call system functions to execute ps(1) command to verify process is zombie

EXPERIMENT NO: 8 c)

Aim:-Write a C program to illustrate how an orphan process is created

Algorithm:

Step 1: call the fork function to create the child process

Step 2:if (pid==0)

Then print child id and parent id

else goto step 4

Step 3:Then sleep(10)

Print child id and parent id

Step 4: Print child id and parent id

Step 5:which gives the information of orphan process

Step 6:stop

Program file name:18.c

```
#include <stdio.h>
```

```
#include<stdlib.h>
```

```
int main()
```

```
{
```

```
int pid;
```

```
printf("I am the original process with PID %d and PPID %d\n",getpid(),getppid());
```

```
pid=fork();
```

```
if(pid == 0)
```

```
{ printf("I am child, my pid is %d ",getpid());
```

```
printf("My Parent pid is:%d\n",getppid());
```

```
sleep(10);
```

```
printf("Now my pid is %d ",getpid());
```

```
printf("My parent pid is:%d\n",getppid());
```

```
exit(0);
```

```
}
```

```
else
```

```
{
```

```
sleep(10);
```

```
printf("I am parent, my pid is %d\n",getpid());
```

```
//printf("I am going to die\n");
```

```
}
```

```
printf("PID:%d terminates...\n",getpid());
```

```
}
```

Execution:

Compilation : [root@dba ~]# cc -o 18 18-1.c

Executing Binary:

```
[root@dba ~]# ./18
```

```
I am the original process with PID 5960 and PPID 5778
```

```
I am child, my pid is 5961 My Parent pid is:5960
```

```
I am parent, my pid is 5960
```

```
PID:5960 terminates...
```

```
[root@dba ~]# Now my pid is 5961 My parent pid is:1
```

Exercises:

S.No.	Task
1	Write a program to illustrate Vfork();
2	Write a program to illustrate fork();

EXPERIMENT NO: 9 a)

Aim:- Write a C program that illustrate communication between two unrelated process using named pipes

Algorithm for server :

- step 1:Start
- step 2:Create a first named pipe by using mkfifo system call
Pipe1=mkfifo(NP1,0666).
- step 3:if mkfifo returns -1 then
print a message that error in creating the pipe.
- step 4:Create a second named pipe by using mkfifo system call
Pipe2=mkfifo(NP2,0666).
- step 5:if mkfifo returns -1 then
print a message that error in creating the pipe.
- step 6:Open the first pipe for reading by open system call by setting
O_RDONLY Fd=open(NP1,O_RDONLY)
- step 7: Open the second pipe for writing by open system call by setting
O_WRONLY Fd=open(NP2,O_WRONLY)
- step 8:read the data from the first pipe by using read system call
numread=Read(fd,buf,MAX_BUF-SIZE) buf*numread+='\0'
- step 9:print the data that we have read from pipe
- step 10:convert the data to the upper case.
- step 11:write the converted string back to second pipe by write(fd,buf, strlen(buf))
- step 12:stop.

Algorithm for client :

- Step 1:start
- Step 2:check whether the no of arguments specified were correct or not
- Step 3:if no of arguments are less then print error message
- Step 4:Open the first named pipe for writing by open system call by setting
O_WRONLY Fd=open(NP1,O_WRONLY)
- Step 5: .Open the second named pipe for reading by open system call by setting
O_RDONLY Fd=open(NP2,O_RDONLY)
- Step 6: write the data to the pipe by using write system call
write(fd,argv[1],strlen(argv[1]))
- Step 7: read the data from the first pipe by using read system call
numread=Read(fd,buf,MAX_BUF_SIZE) buf*numread+='\0'
- Step 8: print the data that we have read from pipe
- Step 9:stop

Program file name:named_pipe.c

```
#include<stdio.h>
#include<stdlib.h>
#include<sys/types.h>
#include<sys/stat.h>
#include<string.h>
#include<fcntl.h>
void server(int,int);
void client(int,int);
int main()
{
int p1[2],p2[2],pid;
    pipe(p1);
    pipe(p2);
    pid=fork();
    if(pid==0)
    {
        close(p1[1]);
        close(p2[0]);
        server(p1[0],p2[1]);
        return 0;
    }
    close(p1[0]);
    close(p2[1]);
    client(p1[1],p2[0]);
    wait();
return 0;
}

void client(int wfd,int rfd)
{
int i,j,n;
char fname[2000];
char buff[2000];
printf("ENTER THE FILE NAME :");
scanf("%s",fname);
printf("CLIENT SENDING THE REQUEST .....PLEASE WAIT\n");

sleep(10);
write(wfd,fname,2000);
n=read(rfd,buff,2000);
buff[n]='\0';
printf("THE RESULTS OF CLIENTS ARE.....\n");
write(1,buff,n);
}
void server(int rfd,int wfd)
{
int i,j,n; char fname[2000];
char buff[2000];
```

```
n=read(rfd,fname,2000);
fname[n]='\0';
int fd=open(fname,O_RDONLY);
sleep(10);
if(fd<0)
    write(wfd,"can't open",9);
else
    n=read(fd,buff,2000);
write(wfd,buff,n);
}
```

Exercises:

S.No.	Task
1	Write a program to demonstrate the function of a pipe
2	Write a program to demonstrate the pipe function using dup() system call

EXPERIMENT NO: 9 b)

Aim:-Write a C program that receives a message from message queue and display them

Algorithm:

Step 1:Start

Step 2:Declare a message queue structure

```
typedef struct msgbuf {  
    long mtype;  
    char mtext[MSGSZ];  
} message_buf;
```

Mtype =0 Retrieve the next message on the queue, regardless of its mtype.

Positive Get the next message with an mtype equal to the specified msgtyp.

Negative Retrieve the first message on the queue whose mtype field is less than or equal to the absolute value of the msgtyp argument.

Usually mtype is set to 1

mtext is the data this will be added to the queue.

Step 3: Get the message queue id for the "name" 1234, which was created by the server key = 1234

Step 4 : if ((msgqid = msgget(key, 0666 < 0)) < 0) Then print error

The msgget() function shall return the message queue identifier associated with the argument key.

Step 5: Receive message from message queue by using msgrcv function

```
int msgrcv(int msgqid, void *msgp, size_t msgsz, long msgtyp, int msgflg);
```

```
#include < sys/msg.h>
```

```
(msgrcv(msgqid, &rbuf, MSGSZ, 1, 0)
```

msgqid: message queue id

&rbuf: pointer to user defined structure MSGSZ: message size

Message type: 1

Message flag: The msgflg argument is a bit mask constructed by ORing together zero or more of the following flags: IPC_NOWAIT or MSG_EXCEPT or MSG_NOERROR

Step 6: if msgrcv < 0 return error

Step 7: otherwise print message sent is sbuf.mext

Step 8: stop

Exercises:

S.No.	Task
1	Write a program to demonstrate a single process create a message queue and sends itself a "welcome" message via the queue
2	Write a program to demonstrate how we can print the status information about the queue

EXPERIMENT NO: 10 a)

Aim:-Write a C program to allow cooperating process to lock a resource for exclusive use using, a) Semaphore

```
#include<stdio.h>
#include<stdlib.h>
#include<error.h>
#include<sys/types.h>
#include<sys/ipc.h>
#include<sys/sem.h>
int main(void)
{
key_t key;
int semid;
union semun arg;
if((key==ftok("sem demo.c","j"))== -1)
{
perror("ftok");
exit(1);
}
if(semid=semget(key,1,0666|IPC_CREAT)== -1)
{
perror("semget");
exit(1);
}
arg.val=1;
if(semctl(semid,0,SETVAL,arg)== -1)
{
perror("smctl");
exit(1);
}
return 0;
}
```

Exercises:

S.No.	Task
1	Write a program using the simpler semaphore operation
2	Write a program to create a semaphore

EXPERIMENT NO: 10 b)

Aim:-Write a C program that illustrate the suspending and resuming process using signal

Algorithm:

- Step 1: call the signal function to generate the signal
- Step 2:execution of process will be started
- Step 3:call alarm function to suspend the execution of current process
- Step 4:then it will execute the signal function
- Step 5:again the process will be resumed
- Step 6:stop

Program

```
#include<stdio.h>
int main()
{
int n;
    if(signal(SIGALRM,sig_alarm)==SIG_ERR)
        printf(,Signal error');
    alarm(5);
    for(n=0;n<=15;n++)
        printf(,from for loop n=%d',n);
    printf(,main program terminated');
}

void sig_alarm(int signo)
{
    printf(,from sigalarm function');
}
```

Exercises:

S.No.	Task
1	Write a program using kill and rise functions
2	Write a program using abort()

EXPERIMENT NO: 10 c)

Aim:-Write a C program that implements producer –consumer system with two processes using semaphores

Algorithm for producer :

- step 1:Start
- step 2:Create a named pipe by using mkfifo system call Pipe1=mkfifo(NP1,0666)
- step 3:if mkfifo returns -1 then print a message that error in creating the pipe
- step 4:Open the pipe for reading by open system call by setting O_RDONLY Fd=open(NP1,O_RDONLY)
- step 5:read the data from the pipe by using read system call
numread=Read(fd,buf,MAX-BUF-SIZE)
- step 6:print the data that we have read from pipe
- step 7:convert the data to the upper case.
- step 8:print the converted data
- step 9:stop.

Algorithm for consumer:

- Step 1:start
- step 2:check whether the no of arguments specified were correct or not
- step3:if no of arguments are less then print error message
- step 4:Open the pipe for writing by open system call by setting O_WRONLY
Fd= open (NP1, O_WRONLY)
- step 5: write the data to the pipe by using write system call write(fd,argv[1],strlen(argv[1]))
- step 6:stop

Consumer:

```
#include<stdio.h>
#include<unistd.h>
#include<fcntl.h>
#define MAXSIZE 10
#define FIFO_NAME "myfifo"
int main()
{
int fifoid; int fd, n; char *r;
system("clear");
r=(char *)malloc(sizeof(char)*MAXSIZE); int open_mode=O_RDONLY;
if( (fd=open(FIFO_NAME, open_mode)) < 0 )
{
printf("\nError: Named pipe cannot be opened\n"); exit(0);
}
while(1)
{
n=read(fd, r, MAXSIZE); if(n > 0)
printf("\nConsumer read: %s", r);
}
} /*main close*/
```

Producer program:

```
#include<stdio.h>
#include<unistd.h>
#include<fcntl.h>
#define MAXSIZE 10

#define FIFO_NAME "myfifo"
```

```

int main()
{
int fifoId; int fd, n; char *w;
int open_mode;
    system("clear");
    w=(char *)malloc(sizeof(char)*MAXSIZE);
    open_mode=O_WRONLY;
    fifoId=mkfifo(FIFO_NAME, 0755);
if(fifoId==-1)
{
    printf("\nError: Named pipe cannot be Created\n"); exit(0);
}
if( (fd=open(FIFO_NAME, open_mode)) < 0 )
{
    printf("\nError: Named pipe cannot be opened\n");
    exit(0);
}
while(1)
{
    printf("\nProducer :"); fflush(stdin);
    read(0, w, MAXSIZE);
    n=write(fd, w, MAXSIZE);
    if(n > 0)
        printf("\nProducer sent: %s", w);

}

} /*main close*/

```

Output:

```

$ cc -o producer producer.c          #first window
$ cc -o consumer consumer.c        # second window
$ ./producer    #first window
$ ./consumer    # second window
Producer:
Producer sent:  hai                #first window
Consumer read: hai                 # second window
Producer sent:  good morning       #first window
Consumer read: good morning # second window
Producer sent:  welcome            #first window
Consumer read: welcome             # second window

```

EXPERIMENT NO: 11

Aim:-Write client server programs using c for interaction between server and clientprocess using Unix Domain sockets

Algorithm:-

Sample UNIX server

Step 1:define NAME "socket"

Step 2: sock = socket(AF_UNIX, SOCK_STREAM, 0);

Step 3:if (sock < 0) perror("opening stream socket");exit(1);

step4: server.sun_family = AF_UNIX;

strcpy(server.sun_path, NAME);

if (bind(sock, (struct sockaddr *) &server, sizeof(struct sockaddr_un)))

{

perror("binding stream socket"); exit(1);

}

step 5: print ("Socket has name %s\n", server.sun_path);

listen(sock, 5);

step 6: for (;;)

{

msgsock = accept(sock, 0, 0);

if (msgsock == -1)

perror("accept");

else

do { bzero(buf, sizeof(buf));

if ((rval = read(msgsock, buf, 1024)) < 0)

perror("reading stream message");

else if (rval == 0)

else print ("-->%s\n", buf);

} while (rval > 0);

close(msgsock);

}

close(sock);

unlink(NAME);

}

Step 7:stop

Programs:

Server.c

```
#include <stdio.h>
```

```
#include <sys/socket.h>
```

```
#include <sys/un.h>
```

```
#include <sys/types.h>
```

```
#include <unistd.h>
```

```
#include <string.h>
```



```

int connection_handler(int connection_fd)
{
    int nbytes;
    char buffer[256];
    nbytes = read(connection_fd, buffer, 256);
    buffer[nbytes] = 0;
    printf("MESSAGE FROM CLIENT: %s\n", buffer);
    nbytes = snprintf(buffer, 256, "hello from the server");
    write(connection_fd, buffer, nbytes);
    close(connection_fd);
    return 0;
}

int main(void)
{
    struct sockaddr_un address;
    int socket_fd, connection_fd;
    socklen_t address_length;
    pid_t child;
    socket_fd = socket(PF_UNIX, SOCK_STREAM, 0);
    if(socket_fd < 0)
    {
        printf("socket() failed\n");
        return 1;
    }

    unlink("./demo_socket");

    /* start with a clean address structure */
    memset(&address, 0, sizeof(struct sockaddr_un));

    address.sun_family = AF_UNIX;
    snprintf(address.sun_path, UNIX_PATH_MAX, "./demo_socket");

    if(bind(socket_fd,
            (struct sockaddr *) &address,
            sizeof(struct sockaddr_un)) != 0)
    {
        printf("bind() failed\n");
        return 1;
    }
}

```

```

if(listen(socket_fd, 5) != 0)
{
    printf("listen() failed\n");
    return 1;
}

while((connection_fd = accept(socket_fd,
                             (struct sockaddr *) &address,
                             &address_length)) > -1)
{
    child = fork();
    if(child == 0)
    {
        /* now inside newly created connection handling process */
        return connection_handler(connection_fd);
    }
    /* still inside server process */
    close(connection_fd);
}
close(socket_fd);
unlink("./demo_socket");
return 0;
}

```

Client.c

```

#include <stdio.h>
#include <sys/socket.h>
#include <sys/un.h>
#include <unistd.h>
#include <string.h>

int main(void)
{
    struct sockaddr_un address;
    int socket_fd, nbytes;
    char buffer[256];

    socket_fd = socket(PF_UNIX, SOCK_STREAM, 0);
    if(socket_fd < 0)
    {
        printf("socket() failed\n");
        return 1;
    }
}

```

```

/* start with a clean address structure */
memset(&address, 0, sizeof(struct sockaddr_un));

address.sun_family = AF_UNIX;
snprintf(address.sun_path, UNIX_PATH_MAX, "./demo_socket");

if(connect(socket_fd,
          (struct sockaddr *) &address,
          sizeof(struct sockaddr_un)) != 0)
{
    printf("connect() failed\n");
    return 1;
}
nbytes = snprintf(buffer, 256, "hello from a client");
write(socket_fd, buffer, nbytes);

nbytes = read(socket_fd, buffer, 256);
buffer[nbytes] = 0;

printf("MESSAGE FROM SERVER: %s\n", buffer);

close(socket_fd);
return 0;
}

```

Exercises:

S.No.	Task
1	Write a program to demonstrate getting and setting the socket option through socket related system call
2	Write a program to demonstrate bind system call.

EXPERIMENT NO: 12

Aim:-Write a C program that illustrates two processes communicating using Shared memory

Algorithm:-

step1.Start

step 2.Include header files required for the program are

```
#include <sys/types.h>
```

```
#include <sys/ipc.h>
```

```
#include <sys/shm.h>
```

```
#include <unistd.h>
```

```
#include <string.h>
```

```
#include <errno.h>
```

step 3.Declare the variable which are required as

```
pid_t pid
```

```
int *shared /* pointer to the shm */
```

```
int shmid
```

step 4.Use shmget function to create shared memory

```
#include <sys/shm.h>
```

```
int shmget(key_t key, size_t size, int shmflg)
```

The shmget() function shall return the shared memory identifier associated with key The argument key is equal to IPC_PRIVATE. so that the operating system selects the next available key for a newly created shared block of memory. Size represents size of shared memory block Shmflg shared memory permissions which are represented by octalinteger

```
shmid = shmget (IPC_PRIVATE, sizeof(int), IPC_CREAT | 0666);
```

```
print the shared memory id
```

step 5.if fork()==0 Then

```
begin
```

```
shared = shmat(shmid, (void *) 0, 0)
```

```
print the shared variable(shared) *shared=2
```

```
print *shared sleep(2)
```

```
print *shared
```

```
end
```

step 6.else

```
begin
```

```
shared = shmat(shmid, (void *) 0, 0)
```

```
print the shared variable(shared)
```

```
print *shared sleep(1) *shared=30
```

```
printf("Parent value=%d\n", *shared);
```

```
sleep(5)
```

```
shmctl(shmid, IPC_RMID, 0)
```

```
end
```

step 7.stop.

Program:

```
#include <sys/types.h>
```

```
#include <sys/ipc.h>
```

```
#include <sys/shm.h>
```

```
#include <unistd.h>
```

```
#include <string.h>
```

```
#include <errno.h>
```

```

int main(void) {
pid_t pid;
int *shared; /* pointer to the shm */ int shmid;
shmid = shmget(IPC_PRIVATE, sizeof(int), IPC_CREAT | 0666); printf("Shared Memory
ID=%u",shmid);
if (fork() == 0) { /* Child */

/* Attach to shared memory and print the pointer */ shared = shmat(shmid, (void *) 0, 0);
printf("Child pointer %u\n", shared); *shared=1;
printf("Child value=%d\n", *shared); sleep(2);
printf("Child value=%d\n", *shared); } else { /* Parent */
/* Attach to shared memory and print the pointer */ shared = shmat(shmid, (void *) 0, 0);
printf("Parent pointer %u\n", shared); printf("Parent value=%d\n", *shared); sleep(1);
*shared=42;
printf("Parent value=%d\n", *shared); sleep(5);
shmctl(shmid, IPC_RMID, 0);
}

}

```

```

sampath@localhost ipc]$cc shared_mem.c
[sampath@localhost ipc]$ ./a.out
Shared Memory ID=65537Child pointer 3086680064 Child value=1
Shared Memory ID=65537Parent pointer 3086680064 Parent value=1
Parent value=42 Child value=42

```

Viva questions

1. define shared memory
2. what are file locking functions.
3. what are shared memory systemcalls.
4. define internet domain sockets
5. Difference between internet and unix domain sockets.

Exercises:

S.No.	Task
1	Write a program to demonstrate communication of two different process via shared memory
2	Write a program to demonstrate that the shared memory created will be available even after the process which created is exited.